

Technical Data

VISKO PRIMER VP - 4005

Type	Acrylic Copolymer Emulsion
Specific Gravity	1.52
Solid by Volume	39 %
Viscosity	15.000 - 20.000 cps
Theoretical Coverage	9 - 13 m ² / kg (1 coat)
Thinning Ratio	30% vol. of clean water

VISKO TOP VT - 4006

Type	Acrylic Copolymer Emulsion
Specific Gravity	1.51
Solid by Volume	38.5 %
Viscosity	20.000 - 25.000 cps
Theoretical Coverage	9 - 13 m ² / kg (1 coat) 5 - 6 m ² / kg (2 coats)
Thinning Ratio	30% vol. of clean water



propan
The Paint Specialist



www.propanraya.com [f](#) Propan Raya ICC

[@propanraya](#) 08111 381 686

propan
The Paint Specialist

VISKO PRIMER TOP

**High Viscosity &
Excellent Hiding Power**
Interior Wall Paint



VISKO PRIMER & VISKO TOP

VP - 4005 VT - 4006

High Viscosity & Excellent Hiding Power Interior Wall Paint

VISKO PRIMER & VISKO TOP is an interior wall and ceiling paint that is formulated with higher viscosity compared to other decorative paint, can be thinned with 30% clean water, in order to give higher coverage.

Product Advantages

- High Viscosity
- High Thinning Ratio
- High Coverage
- Excellent Hiding Power
- Smooth Surface

VISKO PRIMER & VISKO TOP has many other advantages. Please follow the link below to watch product advantages video.

SCAN HERE



bit.ly/viskoprimertop




Available packaging sizes :
VISKO PRIMER : 4 kg & 21 kg
VISKO TOP : 5 kg & 25 kg

High Viscosity

VISKO PRIMER & VISKO TOP are compared with primer & top coat of other brand wall paint, poured on slope glass surface.

Below are the result after:

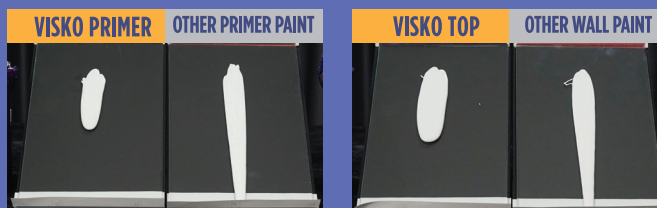

The pictures above show that **VISKO PRIMER & VISKO TOP** are slower to slide down because of higher viscosity, compared to other primer & top coat wall paint.

Note :

- The viscosity of **VISKO PRIMER** is 15,000 - 20,000 cps, while other primer paint is only 3,000-5,000 cps.
- The viscosity of **VISKO TOP** is 20,000 - 25,000 cps, while other wall paint is only 6,000 - 8,000 cps.

Excellent Hiding Power

Based on test result, shows that to perfectly cover the substrate, it needs only **1x VISKO PRIMER** coat & **2x VISKO TOP** coat. Meanwhile for other paint, it needs 1x primer coat and 4x wall paint coat.

Smooth Surface

VISKO PRIMER & VISKO TOP are produced with modern RPS (Rapid Production System) technology from Germany, that produces smooth surface.

High Thinning Ratio

VISKO PRIMER can be thinned with 30% clean water, meanwhile other primer paint has low viscosity and normally no need to be thinned.



VISKO TOP can be thinned with 30% clean water, meanwhile other paint can only be thinned with 10-20% clean water.



High Coverage

VISKO PRIMER & VISKO TOP coverage area are higher than other primer and wall paint. **VISKO PRIMER & VISKO TOP** coverage data can be seen in Technical Data.

