



propan
The Paint Specialist

CERAKOTE CTC - 998
Ceramic tile coatings for bathroom reconditioning

Satu-satunya Cat yang Melekat Kuat di Atas Keramik!

The Only Paint that Sticks to Ceramic Tile!



propan
The Paint Specialist



Certificate ID03/0111



Certificate ID11/1102954057

www.propanraya.com [f](#) Propan Raya ICC

[@propanraya](#) 08111 381 686

CC02/CTC-998/16092020/OMP

CERAKOTE CTC - 998

Ceramic tile coatings for bathroom reconditioning

CERAKOTE CTC-998

Adalah suatu paket sistem untuk pengecatan keramik-keramik tua dan dekil di dalam ruangan seperti pada area kamar mandi, dll. Menjadikan keramik baru kembali tanpa bongkar

CERAKOTE CTC-998

Is a package system for interior ceramic tile reconditioning in areas such as bathroom area, etc. Old ceramic tiles become new and clean again without removed.

CERAKOTE CTC-998


Terdiri atas 1 kg-set Primer Coat Water Based (CTP-980 WB) dan 2 kg-set Top Coat (CTC-998) yang terbuat dari resin berkualitas tinggi, mempunyai daya lekat yang baik pada keramik tile dan mempunyai ketahanan kimia rumah tangga seperti : sabun deterjen, cairan pembersih, dll.

CERAKOTE CTC-998

Consist of one set of Water based primer coat (CTP-980 WB) and two set of Top Coat (CTC-998). CERAKOTE is made by hight quality resin with excellent adhesion and good resistance against house hold chemicals such as : detergent, soap, cleaning fluids, etc.

KEUNGGULAN PRODUK / PRODUCT FEATURE :

- Menggunakan Primer water based, tidak berbau
Consist of Waterbased Primer , No odor
- Daya lekat sangat kuat terhadap keramik
Excellent adhesion on ceramic tile
- Bersih & Higienis
Clean & Hygienic
- Ketahanan terhadap air sangat baik
Excellent water resistance
- Ketahanan terhadap goresan sangat baik
Excellent scratch resistance
- Mudah diaplikasikan, cukup menggunakan kuas atau roll
Easy to apply, just brush and roll




CTC-998 **WHITE**




CTC-998 **LIGHT ALABASTER**



CTC-998 **PALE GREY**

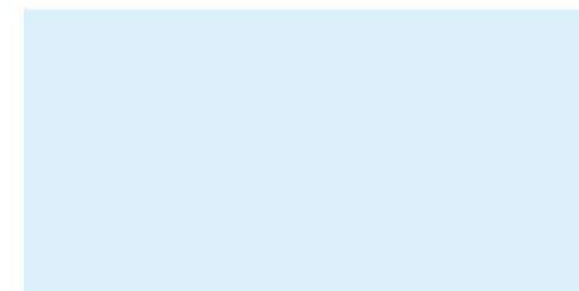

CTC-998 **SKY BLUE**

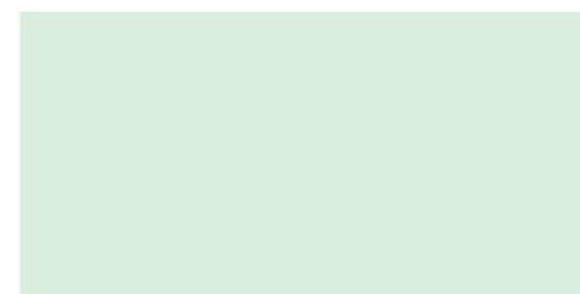

CTC-998 **SEA GREEN**



CTC-998 **BLUE PURPLE**



CTC-998 **LEAF GREEN**



CTC-998 **GENTIAN BLUE**



CTC-998 **TRAFFIC YELLOW**




CTC-998 **GERANIUM RED**



CTC-998 **DARK GREY**



CTC-998 **BLACK**



DECOFLOOR

DECORATIVE, SLIP RESISTANT
CONCRETE COATING

DECOFLOOR

DECOFLOOR is 1 component acrylic waterbased decorative coating, that can be applied as floor and wall coating. DECOFLOOR is specially formulated for several substrates, such as: concrete, natural stone and other substrate with prorus surface, and can be applied both for interior and exterior. DECOFLOOR offers unique dot appearance and can be applied for garage, walking pavement, driveways and balcony. **DECOFLOOR** has a very good penetration to hair crack concrete and resistance to tire marks, oil, dirt and household stain.

Substrate:

- Concrete
- Natural Stone
- Bricks
- Other substrate with porous substrate

Application Area:

- Garage
- Walking pavement
- Driveways
- Balcony

**1 Beautify
The Concrete**

Granite stone appearance

**2 Durable
Color**

Not easy to fade

**3 Excellent
adhesion
on concrete**

Not easy to peel off

**4 Weather
Resistance**

For exterior & interior

**5 Easy
To Apply**

Fast application time

**6 Water
Based**

Environmental friendly



Diamond Grey

9492



Granite Grey

9491



Aurora Clay

3448



Carnival Brown

3447



Mountain Blue

6454



Victoria Green

8419

APPLICATION PROCEDURE



1 Mix well Concrete Floor Wash with water (ratio 1 : 1).



4 Mix Decofloor flake to Decofloor Basic Coat and mix well, without any thinner.

Pour Decofloor to the roller tray.



2 Use Concrete Floor Wash to clean and open the substrate pores.



5 Apply DECOFLOOR by using mohair roll to all concrete substrate, let dry at least 3 - 4 hours.



3 Brush concrete surface and rinse with clean water to clean the remains Concrete Floor Wash. Let dry for 24 hours before applied DECOFLOOR.



6 Apply DECOFLOOR 1 more time without thinner and let dry. Let it dry completely, at least 3 days, before substrate ready to use.

MIXING :



DECOFLOOR
Basic Coat
3 kg




DECOFLOOR
Flake*
1 kg

* Flake packaging is separated.

Type	Acrylic water based
Color	See colorcard
Specific gravity	1,27 g/cc
Application method	Roll mohair
Thinner	-
Packaging	4 kg-set
Re-coating time	3 - 4 hours (30° C)
Coverage	1 - 2 m²/kg (1 coat)



Tangga Besi

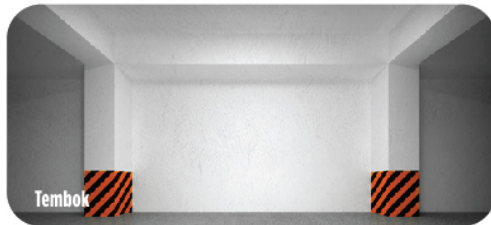

Tembok



Meja dan kursi kayu



Pagar besi



Rackling



Mesin

propan
The Paint Specialist



Certificate ID03/0111



Certificate ID11/1102954057

Untuk informasi lebih lanjut, hubungi :
For further information, please contact us :

PROPAN INSPIRATION CENTER : ■ JAKARTA : ■ Satria : Phone : (+62 21) 5680081, 5680082, Fax: (+62 21) 5680153 | PROPAN SANDIMAS HOME CENTER : ■ DENPASAR : Phone : (+62 361) 8495080, Fax: (+62 361) 419247 | PROPAN SERVICE CENTER : ■ BANDUNG : ■ Soekarno Hatta : Phone : (+62 22) 7507776, Fax: (+62 22) 7500775 ■ BALIKPAPAN : Phone : (+62 542) 7212410, 7212411, Fax: (+62 542) 7212064 ■ BANJAR-MASIN : Phone : (+62 511) 4229655, Fax: (+62 511) 4229559 ■ BATAM : Telp: (+62 778) 466438, Fax: (+62 778) 7418769 ■ BEKASI : Phone : (+62 21) 88851727, 88851728, Fax: (+62 21) 8842070 ■ BOGOR : Phone : (+62 251) 8652599, Fax: (+62 251) 8653079 ■ CIREBON : Phone : (+62 231) 231825, Fax: (+62 231) 237616 ■ DENPASAR : Phone/Fax: (+62 361) 8495088 ■ JAKARTA : ■ Kelapa Gading : Phone : (+62 21) 4516377, 4516379, Fax: (+62 21) 4517007 ■ Fatmawati : Phone : (+62 21) 7237851, 7237854, Fax: (+62 21) 7237855 ■ JEPARA : Phone : (+62 291) 594372, 3319372, Fax: (+62 291) 594372 ■ LAMPUNG : Phone : (+62 721) 704491, Fax: (+62 721) 771001 ■ MAKASSAR : Phone : (+62 411) 8111036, Fax: (+62 411) 8111037 ■ MANADO : Phone/Fax: (+62 431) 8880585 ■ PALEMBANG : Phone : (+62 711) 715360, 715361, 5480083, Fax: (+62 711) 715362 ■ PONTIANAK : Phone : (+62 561) 6598896, Fax: (+62 561) 6598894 ■ SAMARINDA : Phone : (+62 541) 7074750, Fax: (+62 541) 744293 ■ SEMARANG : Phone/Fax: (+62 24) 3581023 ■ SURABAYA : ■ Darmo : Phone : (+62 31) 5684855, 5616828, Fax: (+62 31) 5623622 ■ RMI : Phone : (+62 31) 5043536, 5041237, Fax: (+62 31) 5055071 ■ YOGYAKARTA : Phone : (+62 274) 871044 ■ E-mail : info@propanraya.com ■ website: ■ www.propanraya.com ■ @PropanRayalCC ■ propanraya

DISTRIBUTOR : ■ BRUNEI DARUSSALAM, HIAP GUAN Sdn. Bhd : Phone: +673-2429020 / 2427266, Fax: +673-242 1653 ■ MALAYSIA, SYN TAI HUNG TRADING Sdn. Bhd : Phone : +603-2287 9221 / 2287 5218, Fax: +603-22879225 ■ MALAYSIA, ALKANA MALAYSIA. Sdn. Bhd: Phone : +603-5162 5789 / 91 / 63, Fax: +603-5162 5742 ■ PHILIPPINES, SPURWAY ENTERPRISES : Phone : +632-413 7124 / 26, Fax: +632-7274128 ■ MALDIVES, MAZIYA SERVICE Pvt Ltd : Phone : +960-3336729 / 3326169, Fax: +960-3336728 ■ THAILAND, ADISAK TRADING Co. Ltd. : Phone : +66-76-261 420-6, Fax: +66-76-261 427 ■ SINGAPORE, PAINTMART Pte. Ltd : Phone : +65-6848 0746, Fax: +65 6841 4172 ■ VIETNAM, ALKANA, Thu Dau Mot City : Phone : +084-0650 3635 330, Fax: +84-0650 3635 339

Brochure no.01/MX-98/OMP

www.propanraya.com

@epoxypropan

catlantaipropan

propan
The Paint Specialist

MULTI-POX
Multipurpose Epoxy Enamel


MX-98 2K SB
A : B = 3 : 1

Ready for Use



new

DO IT YOURSELF
DIY

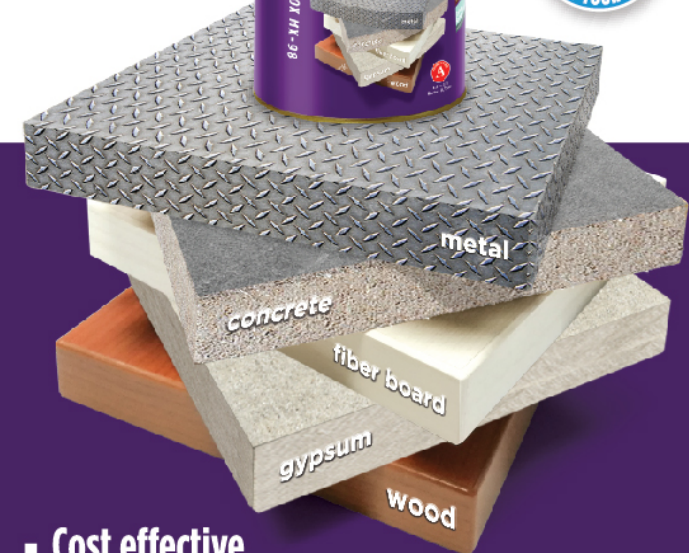

- Cost effective
- Multipurpose
- Easy to use
- Do it your self

B01/MX-98/08112019/OMP

MULTI-POX MX-98-2K SB

adalah varian terbaru dari produk MULTIPOX. Cat epoxy serba guna yang lebih efektif dan efisien. Diformulasikan khusus sebagai lapisan akhir pada berbagai macam substrat seperti besi, kayu, gipsium, mdf, keramik dan juga beton.

Sangat cocok untuk diaplikasikan pada area atau substrat yang memerlukan tingkat kebersihan, ke higienisan yang tinggi dan tahan air.

MULTI-POX MX-98-2K SB

is a new variant of MULTIPOX brand. Cost effective multipurpose epoxy enamel. Specially designed as top coating for many kinds of substrate such as metal, wood, gypsup, mdf board, concrete ceramic, etc

Highly recommended for floor, wall and ceiling in a place where cleanleanes and waterproofing as required.

Karakteristik produk

Product characteristic :

Serbaguna

Hemat Biaya

Multipurpose

Cost Effective

Ketahanan Air yang Baik

Awet Dan Tahan Lama

Excellent Water Resistant

Durable and Long Lasting

Daya Lekat Sangat Kuat

Tidak mudah terkelupas

Excellent Adhesion to substrate

Not Easy to Peel Off

Mencegah Tumbuhnya Jamur

Bersih dan higienis

Mold Resistant

Clean and Hygienic

Mudah Diaplikasikan

Bisa Dilakukan Sendiri

Easy to Use

You Can Do It Your Self

Tahan Bahan Kimia


Lapisan film yang kuat

Chemicals Resistant


Strong Film Layer

Media aplikasi


Substrat :

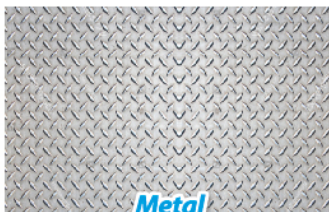


Metal

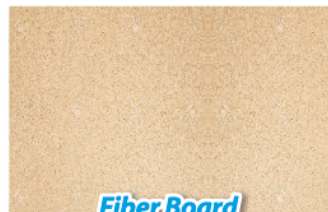


Fiber Board

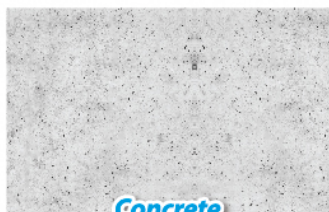

Concrete

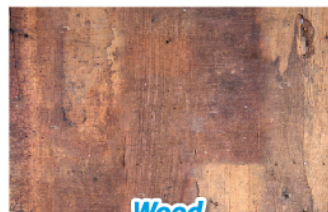

Wood

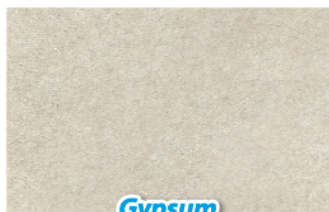

Gypsum

Metode produk

Product methode :



Roll



Spray



Brush



Data teknis

Technical data :

• Tipe Type	: Epoxy Based 2 komponen Epoxy Based 2 component
• Kadar padatan Solid content	: 60 ± 2%
• Perbandingan Mixing ratio	: Komp. A : B = 3 : 1 w/w 1 Kg A = 0,75 Kg B = 0,25 Kg 5 Kg A = 3,75 Kg B = 1,25 Kg 20 Kg A = 15 Kg B = 5 Kg
• Daya sebar Coverage	: 5 m ² /kg-set (±100 mic DFT)
• Pengenceran Thinning	: 5 - 10% (jika diperlukan) 5 - 10% (if necessary)
• Umur campuran Pot life	: 2 jam (30°C) 2 hours (30°C)
• Hasil akhir Final result	: Gloss
• Lapisan ke-2 setelah Recoating interval after	: 6 jam (30°C) 6 hours (30°C)
• Kemasan Packaging	: 1; 5 dan 20 Kg-set

Tahapan aplikasi

Application procedure :

1. Bersihkan permukaan substrat dari debu, minyak ataupun kotoran lainnya. Pastikan permukaan substrat kering dan bersih sebelum diaplikasi.
Clean the surface from dust, oil and other contaminants. Make sure the floor surface must be clean and dry before apply.
2. Campur Komp A dan B sesuai perbandingan. Aduk hingga benar benar rata ± 2 menit, kemudian aplikasi menggunakan kuas, roll atau sprai Mix comp A and B.
with mixing ratio 3 : 1 by weight. Stir well ± 2 minutes and apply the mixture by brush, roll or spray.
3. Campuran bisa diencerkan menggunakan thinner epoxy sebanyak 5 -10% jika diperlukan.
If necessary, mixture can be thinning with epoxy thinner 5-10%.

TECHNICAL DATA

- **Type** : Two components solvent free epoxy grout
- **Standard Color** : Tinting Color (more than 100 color choice)
- **Appearance** : Semi gloss
- **Solid content** : 98%
- **Coverage area m²/L-set** :

Ceramic thickness mm	Material Consumption (gr/m) Ceramic gap width			
	3 mm	5 mm	8 mm	10 mm
6	25.00	41.00	66.00	83.00
8	33.00	55.00	88.00	110.00
10	41.00	69.00	110.00	138.00
20	83.00	138.00	220.00	275.00

- **Drying time :**
 - Surface dry : 4 hours (30°C)
 - Hard dry : 24 hours (30°C)
 - Full Cure : 7 days (30°C)
- **Mixing Ratio** : Comp A : B = 9 : 1 by weight
- **Pot Life** : 30 minutes (30°C)
- **Application Temperature** : minimum 10°C

Available on standard color



www.propanraya.com Propan Raya ICC

@propanraya 08111 381 686

Brochure no.01/PET-11/OMP



EPOXY TILE GROUT PET-11




B01/PET-11/11052023/OMP

EPOXY TILE GROUT is a two components epoxy based tile grout that contain anti microbia (certificate 68/IPBCC/An.Mik/08/15) to prevent fungi and bacterial growth on grout permanently.

The advantage of using epoxy based ceramic grout is non-shrinkage during application, so it is suitable for new types of ceramics.

Another advantages are excellent adhesion and chemical resistance, so it is suitable for many area of application such as laboratory, hospital, pharmacy, restaurant, kitchen, factory, housing area, swimming pool, water storage tank as well as area where hygienic and sterile condition is required.

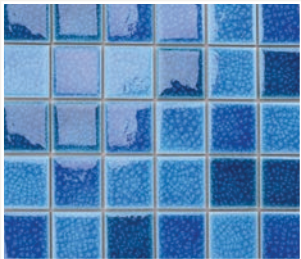


Ceramic tile



Granite tile



Marble

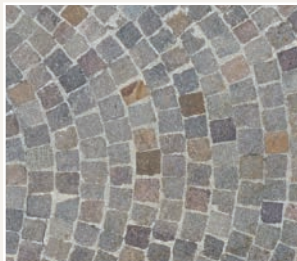

Natural Stone

ADVANTAGES

2 Component

Strong and durable

Strong Adhesion

Not shrinking & Anti cracking

Chemical Resistance

Easy to clean

Non Sagging

Can be applied vertically

Anti Bacteria

Clean and Hygiene


APPLICATION PROCEDURE

1. Clean ceramic and ceramic gap from dust and other dirt.
2. Mix component A and B (with mixing ratio A : B= 9 : 1), mix well. Do not add thinner or water.
3. Pour the mixture to substrate, flatten by using rubber trowel/paint knife. Make sure the gap are fully filled uniformly.
4. Clean off the surplus grout from ceramic surface by using damp sponge or clean wet clothes ± 5 minutes after application. Clean with water, use thinner only if necessary.
5. Let it dry for 20 - 24 hours.

AREA :



Swimming pool

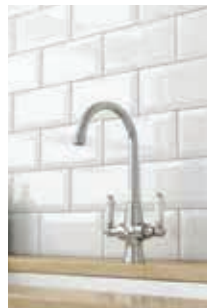

Floor area or interior wall



Dry & wet area

NOTE:

- ▶ Please mix the solution as needed only because the pot-life after mixing is only 30 minutes.
- ▶ **Substrat :**
 - Ceramic
 - Paving block
 - Granite Stone
 - Natural Stone
 - Marble
- ▶ Tinting color available to match with ceramic color.



Does your floor looks Dull and boring?
Want to Make it Looks Outstanding?

Apply Epoxy Color Sand !

The Aesthetic Flooring System for Every Space

Decorative floor coating that's easy to clean

- ✓ Easy to Clean
- ✓ Durable & Long lasting
- ✓ Aesthetic
- ✓ Chemical & Water Resistant


Color Options



Off White



Light Grey

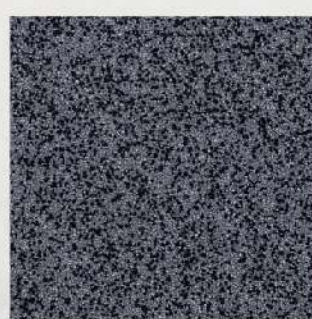

Grey




Soft Pink



Carmine Red




Leaf Green

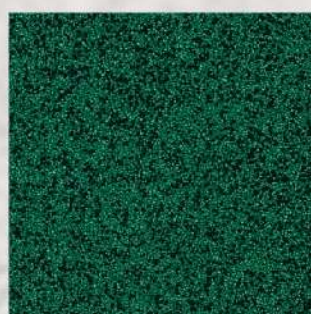


Dark Green



Emerald Green

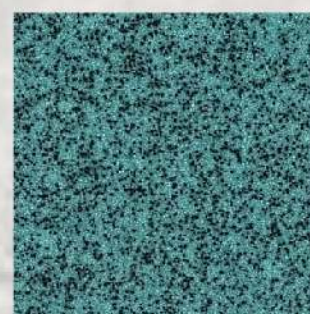

Light Blue

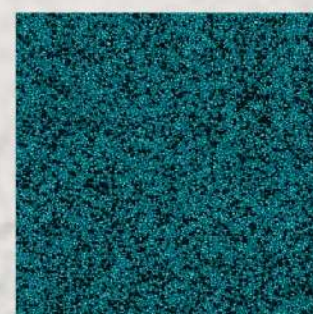

Ocean Blue

Perfectly suitable for Various Area



Industrial Areas



Sport
Facilities



Hotels, Cafes &
Restaurants



Garages,
showrooms, malls



Offices &
schools



Residential,
Hospitals



cari cat
cari propan





Tennis Court



Paving Blocks



Basket Ball Court



City Park



Playground



propan
The Paint Specialist



Certificate ID03/0111



Certificate ID11/1102954057

www.propanraya.com

[f](#) Propan Raya ICC

[@propanraya](#)

08111 381 686

BC no.01/R2/TNK1000WA/OMP

propan
The Paint Specialist

TENNOKOTE®
THE ALL WEATHER SPORT COURT COATING



The only Indonesian sport court coating products with International Certification
INTERNATIONAL TENNIS FEDERATION
Reg. No : 01 / 02 - 17- L - CST - 536 - A

**NON SLIP COATING
FOR SPORT COURTS**



B01/TNK1000WA/09062022/OMP

TENNOKOTE TNK-1000 WA

THE ALL WEATHER SPORT COURT COATING

TENNOKOTE TNK - 1000 WA is a special coating for sport court, the only Indonesian product that is internationally certified, suitable for exterior and interior and have good adhesion for concrete, asphalt as well as paving block, so that can be used for city park, playground, side walk, car port, etc.

FEATURES

- ▶ **Water Based**
- ▶ **No Odor**
- ▶ **Good Adhesion**
- ▶ **UV Resistant**
- ▶ **Non Slip**
- ▶ **Quick Drying**
- ▶ **Free Mercury / Heavy Metal**
- ▶ **Easy to Apply**
- ▶ **12 Attractive Colors**



APPLICATION HINTS

1. The surface to be coated must be clean, dry and free from dust, grease and loose dirt.
2. Use grinder (Abrasive Cleaning), wire brush (manual or machine) if it is necessary add soap powder and rinse with clean water until it is really clean and then let it dry.
3. Stir TENNOKOTE thoroughly before applying.
4. Pour $\pm 10\%$ clean water (only when necessary), in to the mixture especially for the first / primer coat.
5. Apply 2-3 coats using brush or roller, allow 2 hours interval between coatings.
6. It is recommended applying TENNOKOTE in cross direction against the preceding coat for optimum result.
7. Protect the wet coat (within 2 hours of application) from rain, water and extreme temperature.
8. Do not apply under direct sunlight exposure or onto very hot surfaces.

NOTES:

1. If the paint is too condensed, thin sufficiently by water.
2. For the best result, do not apply in the rainy season, because **TENNOKOTE TENNIS COURT COATING TNK-1000 WA** can be dissolved by rainwater if it is not dried perfectly .
3. Do not apply under direct sunlight exposure.
4. Use the primer coal **TENNOKOTE SEALER TNK-1020 WA** to cover the pores from rough surfaces on courts made of asphalt.

PRODUCT DATA

■ Type	: Water based
■ Color	: As shown in the color card (12 attractive color)
■ Finish	: Matt
■ Solid by volume (mixture)	: 47%
■ Specific gravity (mixture)	: 1.20
■ Material consumption	: 1,5-2,0 m ² /kg (200 microns / three Coats included quartz sand)
■ Diluent	: Clean water
■ Recomended coating step	: I. 2 x coats include 10% quartz sand II. 1x coats top coat without sand.
■ Drying time	
Surface dry	: 10 minutes (30°C)
Hard dry	: 2 hours (30° C)
Ready to play	: 48 hours
■ Packaging	: 4.5 Kg & 22.5 kg (+ quartz sand 10 %)
■ Storage stability	: One year in original not opened boxes

Paints Required For Sport Court

Sport Courts	Courts Size	Courts Width	+ TENNOKOTE Paint Required
Tennis	10.97 x 23.78 m	260.86 m ²	6 Pail (6 x 25 kg)
BasketBall	28 x 15 m	420 m ²	9 Pail (9x 25 kg)
Futsal	25 x 15 m	375 m ²	8 Pail (8x 25 kg)
Volleyball	9 x 18 m	162 m ²	4 Pail (4x 25 kg)
Badminton	13.4 x 6.10 m	81.74 m ²	2 Pail (2x 25 kg)

Court Lines : $\pm 1 \times 5$ Kg, White / Yellow

Court Lines : Depending on the side court area
1 Kg of paint = 1.5 - 2.0 m²

SILIKAT FLOOR

APPLICATION SYSTEM :

- **Dust Free Floor System :**
 - **PENETRAN : SKF - 201-1K WB**
- **Heavy Duty Floor System :**
 - **PENETRAN : SKF - 201-1K WB**
 - **TOPPING : SKF - 203-1K WB**



HOW TO MAKE YOUR GREEN CONCRETE FLOOR SHINE AND FREE FROM DUST



Do you have problems with your concrete floor ? Is it dusty? Easy to wear off? Or not impact resistant ? It can affect your operational business and waste your money on repairing.

PROPAN with updated technology in liquid hardener / densifier system can provide solution for this problems.

PROPAN - Liquid Hardener / Densifier System uses lithium silicate material, which can react directly with cement on concrete floor.

It does not form a layer on top of the concrete floor, but it penetrates to the concrete pores and form a chemical reaction with cement, it make the concrete become hardened, abrasion resistance, dust free and shiny. The room will become brighter because the floor can give light reflective. However, the floor is not slippery. This system can be applied for old or new concrete. It is suitable for industrial, warehouse, car park, shopping mall, cafe/restaurant, airport, etc. It looks natural as natural.

THE FUNCTION OF LIQUID HARDENER / DENSIFIER

- | | |
|------------------------|--|
| LIQUID HARDENER | : Hardening the concrete surface become abrasion and scratch resistance |
| DENSIFIER | : Densifying the concrete as the concrete pores become smaller |
| DUST PROOFER | : The floor has no more dust as Ca(OH)_2 which is the excess from concrete / cement has been reacted with Lithium Silicate Polymer. |

SILIFICATION REACTION OF LIQUID HARDENER




DRY-SHAKE FLOOR HARDENER (POWDER FLOOR HARDENER) VS LIQUID FLOOR HARDENER/DENSIFIER

CHARACTERISTIC	DRY-SHAKE FLOOR HARDENER (POWDER FLOOR HARDENER)	LIQUID FLOOR HARDENER/DENSIFIER
Appearance	Non-uniform finish look	More uniform finish look (if the concrete quality is good & polished)
Hardness	Very hard	Very hard
Abrasion Resistance	Good abrasion resistance	Good abrasion resistance and scratch resistance
Liquid & Stain Resistance	Not resistant to liquid or stain	Good resistance to liquid & stain
Application	Must be applied during casting of concrete	Can be easily applied on new or old concrete
Curing time	Total curing time is 28 days, but floor can be used after 7 days normally	Floor can be used after 24 hours, Fully dry in 7 days
Dusting	Some dusting	Dust free
Maintenance	Requires periodic maintenance such as waxing in high traffic areas	Easy to maintenance, no waxing required
Cleaning	Stain, tyre marks, contamination are hard to remove	Stain, tyre marks, contamination are easy to remove

LIQUID HARDENER / DENSIFIER TECHNOLOGY

APPLICATION FOR POLISHED CONCRETE

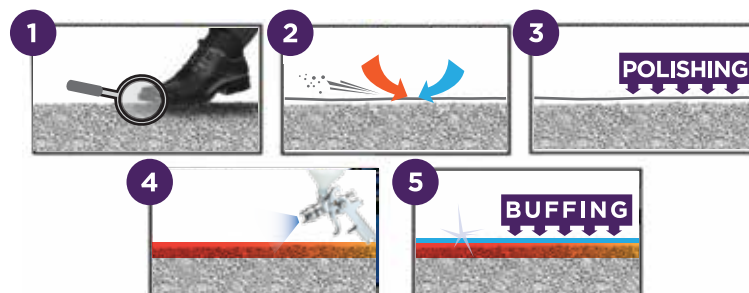

- 1 If you look very closely at your concrete floor, they're not flat, they have cracks & volleys
- 2 More wear on movement, wear causes particles that become dust
- 3 We grind or "cut" the surface down in millimeters
- 4 We apply the concrete reactive stabilizer enhancing density and hardener and sealing the pores
- 5 Finally we buff the concrete until we get the desired shine and beauty

PACKAGING : 5 Lt & 20 Lt

adalah cat yang terbuat dari 100% acrylic berkualitas tinggi yang diformulasikan khusus untuk pengecatan garis pada jalan, trotoar, lantai parkir, lantai pabrik, taman bermain, dll. TRAFFIKOTE cocok diaplikasikan untuk lantai interior maupun eksterior yang terbuat dari beton, aspal dan paving block. TRAFFIKOTE merupakan cat yang tahan terhadap abrasi dan beban berat sehingga dapat menghindari pengecatan yang berulang-ulang.

TRAFFIKOTE is high quality acrylic 100% paint specially formulated painting lines for road, sidewalks, parking lots, factory floors, playgrounds, etc. TRAFFIKOTE suitable for floors constructed of concrete, asphalt, bricks, etc. TRAFFIKOTE are durable and abrasion resistant to heavy traffic and weather conditions avoiding frequent reapplications.

Keunggulan Produk : Product Features :

Mudah diaplikasikan diatas beton, aspal, maupun paving block.

Easy to apply for concrete, asphalt and bricks.

Meminimalkan "bleeding" pada saat aplikasi.

Minimizes bleeding upon application.

Untuk area dengan lalu lintas tinggi.

For high traffic area.

Berpelarut air.

Water based.

Tahan terhadap cuaca.

Extremely durable and weather resistant.

Tahan abrasi & Daya lekat kuat.

Abrasion resistant & Excellent adhesion.



Tahapan Aplikasi : Application Procedure :

- Bersihkan permukaan substrat dari jamur, lumut, minyak ataupun kotoran lainnya. Untuk substrat lama yang sudah pernah dicat, kupas cat lama sampai benar-benar bersih. Pastikan permukaan substrat kering dan bersih sebelum diaplikasikan.
Clean the substrate from fungi, mold, grease and other contaminants. Peel off the old paint to really clean for the old substrate that has been painted. Make sure the substrate must be clean and dry before apply.
- Aduk terlebih dahulu TRAFFIKOTE sebelum diaplikasikan.
Stir TRAFFIKOTE thoroughly before apply.
- Aplikasikan lapis pertama TRAFFIKOTE dengan menggunakan kuas atau roll secara merata. Kemudian aplikasikan lapis kedua setelah 1-2 jam untuk hasil yang maksimal. Daya sebar sekitar 20 m²/kg (lebar 10 cm, tebal 200 mikron).
Apply first coat TRAFFIKOTE by roll and brush. For best result, apply second coat with recoating interval 1-2 hours. Coverage is 20 m²/kg (10 cm width, 200 microns thickness).
- Untuk aplikasi menggunakan spray, tambahkan air ± 10 % sebagai pengencer.
For application by spray, thinning with clean water ± 10%.

Untuk Efek Reflektif / For Reflective Effect :

Untuk mendapatkan efek reflektif, taburkan TRAFFIKOTE Glassbeads segera setelah cat diaplikasikan. TRAFFIKOTE Glassbeads harus tercelup 60 % di permukaan cat yang sudah diaplikasikan untuk mendapatkan efek reflektif yang optimal dan permanen.

TRAFFIKOTE Glassbeads may be applied immediately to wet paint to create reflective marking. TRAFFIKOTE Glassbeads should be embedded 60 % into the film paint to get optimal and permanent retroreflectivity.



TAHAN GORES
SCRATCH RESISTANCE



ADUK DAHULU
STIR THOROUGHLY



KUAS
BRUSH



ROLL
ROLLER



SEMPROT
SPRAY

Data Teknis Technical Data

Type :	Acrylic Dispersion Color
Color :	Black, Blue, Red, Yellow, White, Green
Solid by volume :	± 60%
Spesific Grafity :	1.5 g/cc
Finish :	Flat
Theoretical Coverage :	20 m ² / kg (10 cm line width, 200 micron DFT/coat)
Recommended coating system :	Spray (1x coat) Roll, Brush (2x coat)
Thinning/ Reducer/ Clean up	Clean water
Thinning/ reduction :	As needed, maximum 10% by volume
Recoating Interval :	1 - 2 hours

- Warna yang tersedia / Available colors :
White, Blue, Black, Yellow, Green, Red.



Rekomendasi Penggunaan : Recommended Usage :

- Pusat Perbelanjaan / **Shopping Center**
- Garis Parkir dan Garasi / **Parking Lots and Garage**
 - Gudang / **Wirehouse**
- Tempat bermain / **Playgrounds**
- Marka Jalan / **Traffic and lining streets**
- Tempat lain yang membutuhkan tanda garis /
Other area where zone marking are required



* Tersedia kemasan 20 kg untuk proyek/ available 20 kg for project.

adalah cat solvent base yang diformulasikan khusus untuk aplikasi marka, baik Eksterior maupun Interior. **TRAFFIKOTE TFK - 110 SB** digunakan untuk pengecatan garis dan marka jalan yang terbuat dari beton atau aspal. Direkomendasikan untuk pengecatan di area parkir, lantai pabrik, gudang, area bermain, pusat perbelanjaan dan area lain yang membutuhkan marka.

TRAFFIKOTE TFK - 110 SB is a conventional dry (non heated application) solvent based paint intended for interior and exterior zone marking.

TRAFFIKOTE TFK - 110 SB is used as a finish coat in traffic or lining system. It is suitable for Concrete, asphalt, Shopping centers, Parking lots, Warehouse floors, Playgrounds, Streets. Other areas where zone markings are required.

Keunggulan Produk : Product Features :

- **Cepat kering /**
Fast drying.
- **Tampilan menarik /**
Excellent eye visibility.
- **Tahan Abrasi/**
Abrasion resistant.
- **Tahan Cuaca/**
Weather resistant.
- **Mudah diaplikasikan/**
Easy to apply.



TAHAN GORES
SCRATCH RESISTANCE



ADUK DAHULU
STIR THOROUGHLY



KUAS
BRUSH



ROLL
ROLLER



SEMPROT
SPRAY

Tahapan Aplikasi : Application Procedure :

- Bersihkan permukaan yang akan di cat dari jamur, lumut, minyak, ataupun kotoran lainnya. Untuk substrat lama yang sudah pernah dicat, kupas cat lama hingga benar – benar bersih. Pastikan permukaan substrat kering dan bersih sebelum diaplikasi.
Clean the surface from fungi, mold, grease and other contaminants. Peel off the old paint to really clean for the old floor that has been painted. Make sure the floor surface must be clean and dry before apply.
- Aduk terlebih dulu TRAFFIKOTE TFK-110 SB sebelum diaplikasikan.
Stir before apply TRAFFIKOTE TFK- 110 SB.
- Aplikasikan lapis pertama TRAFFIKOTE (TFK-110 SB) dengan menggunakan kuas atau roll secara merata. Kemudian aplikasikan lapis ke dua setelah 20 - 30 menit. Daya sebar sekitar 10m²/lt (lebar 10 cm, tebal 40 mikron)
Apply first coat TRAFFIKOTE (TFK- 110 SB) by roll and brush. For best result, apply second coat with recoat-ing interval 15-20 minutes. Coverage is 10m²/lt (10 cm width, 40 microns thickness).
- Untuk mempermudah aplikasi, bisa di tambahkan thinner serbaguna maksimal 10% sebagai pengencer. *For easy application, can be thinning with thinner max 10%.*

Data Teknis Technical Data

Type :	Modified Chlorinated Rubber Resin
Color :	Black, Blue, Red, Yellow, White, Green
Solid by volume :	± 49-53 %
Spesific Gracity :	1.5 g/cc
Finish :	Flat Matt
Theoretical Coverage :	6.6 m ² / kg (base on 40 microns DFT per coat thickness)
Recommended coating system :	Spray (1x coat) Roll, Brush (2x coat)
Thinning/ Clean up :	Thinner
Recoating Interval :	0.5 – 24 hours (30 derajat celcius)



Untuk informasi lebih lanjut, hubungi :
For further information, please contact us :

PROPAN INSPIRATION CENTER : ■ JAKARTA : ■ Satria : Phone : (+62 21) 5680081, 5680082, Fax.: (+62 21) 5680153 | PROPAN SANDIMAS HOME CENTER : ■ DENPASAR : Phone : (+62 361) 8495080, Fax.: (+62 361) 419247 | PROPAN SERVICE CENTER : ■ BANDUNG : ■ Soekarno Hatta : Phone : (+62 22) 7507776, Fax.: (+62 22) 7500775 ■ BALIKPAPAN : Phone : (+62 542) 7212410, 7212411, Fax.: (+62 542) 7212064 ■ BANJAR-MASIN : Phone : (+62 511) 4229655, Fax.: (+62 511) 4229559 ■ BATAM : Telp.: (+62 778) 466438, Fax.: (+62 778) 7418769 ■ BEKASI : Phone : (+62 21) 88851727, 88851728, Fax.: (+62 21) 8842070 ■ BOGOR : Phone : (+62 251) 8652599, Fax.: (+62 251) 8653079 ■ CIREBON : Phone : (+62 231) 231825, Fax.: (+62 231) 237616 ■ DENPASAR : Phone/Fax.: (+62 361) 8495088 ■ JAKARTA : ■ Kelapa Gading : Phone : (+62 21) 4516377, 4516379, Fax.: (+62 21) 4517007 ■ Fatmawati : Phone : (+62 21) 7237851, 7237854, Fax.: (+62 21) 7237855 ■ JEPARA : Phone : (+62 291) 594372, 3319372, Fax.: (+62 291) 594372 ■ LAMPUNG : Phone : (+62 721) 704491, Fax.: (+62 721) 771001 ■ MAKASSAR : Phone : (+62 411) 8111036, Fax.: (+62 411) 8111037 ■ MANADO : Phone/Fax.: (+62 431) 8880585 ■ PALEMBANG : Phone : (+62 711) 715360, 715361, 5480083, Fax.: (+62 711) 715362 ■ PONTIANAK : Phone : (+62 561) 6598896, Fax.: (+62 561) 6598894 ■ SAMARINDA : Phone : (+62 541) 7074750, Fax.: (+62 541) 744293 ■ SEMARANG : Phone/Fax.: (+62 24) 3581023 ■ SURABAYA : ■ Darmo : Phone : (+62 31) 5684855, 5616828, Fax.: (+62 31) 5623622 ■ RMI : Phone : (+62 31) 5043536, 5041237, Fax.: (+62 31) 5055071 ■ YOGYAKARTA : Phone : (+62 274) 871044 ■ E-mail : info@propanraya.com ■ website: ■ www.propanraya.com ■ @PropanRayaCC ■ propanraya

DISTRIBUTOR : ■ BRUNEI DARUSSALAM, HIAP GUAN Sdn. Bhd : Phone: +673-2429020 / 2427266, Fax.: +673-242 1653 ■ MALAYSIA, SYN TAI HUNG TRADING Sdn. Bhd : Phone : +603-2287 9221 / 2287 5218, Fax.: +603-22879225 ■ MALAYSIA, ALKANA MALAYSIA. Sdn. Bhd: Phone : +603-5162 5789 / 91 / 63, Fax.: +603-5162 5742 ■ PHILIPPINES, SPURWAY ENTERPRISES : Phone : +632-413 7124 / 26, Fax.: +632-7274128 ■ MALDIVES, MAZIYA SERVICE Pvt Ltd : Phone : +960-3336729 / 3326169, Fax.: +960-3336728 ■ THAILAND, ADISAK TRADING Co. Ltd. : Phone : +66-76-261 420-6, Fax.: +66-76-261 427 ■ SINGAPORE, PAINTMART Pte. Ltd : Phone : +65-6848 0746, Fax.: +65 6841 4172 ■ VIETNAM, ALKANA, Thu Dau Mot City : Phone : +084-0650 3635 330, Fax.: +84-0650 3635 339

Brochure no.02/TFK/OMP

TraffiKOTE

ZONE MARKING PAINT



TFK-108 WB

Water Based



Zebra cross



Green cycle track



Handicapped parking space



TFK-110 SB

Solvent Based



FAST DRY SOLVENT BASED PAINT



Zebra cross

Handicapped parking space

Green cycle track