

Project References



Angsana Velavaru Resort
Maldives



Kayu Manis Hotel
Bali



W Hotel
Bali



Karma Jimbaran Resort
Bali

propan
The Paint Specialist



Certificate ID03/0111



Certificate ID11/1102954057

www.propanraya.com [Propan Raya ICC](#)

[@propanraya](#) 08111 381 686

Brochure No.01/ULTRANLASUR/TON

propan
The Paint Specialist

English
Version

Ultran Lasur

Deep Penetrating
Exterior Lasur



*The Best
Wood Care System
in the Country*

B01ULTRANLASUR/150323.TON

Ultran Lasur



Coverage: 3 – 4 m²/lt for 3x coats

Ultran Lasur EL-501 is specifically designed with deep wood penetration properties to provide excellent wood protection in tropical climates.

Ultran Lasur EL-501 is highly recommended for outdoor and indoor use, especially on wooden doors, windows, gazebos, garden furniture, and other wooden surfaces that are exposed intensively to extreme weather.


Advantages

- Deep penetration into wood pores
- Excellent water repellent with permeable film
- Excellent UV resistance
- Easy to apply and maintain



How Does Ultran Lasur Work?

Ultran Lasur protects the wood from damage caused by UV rays, rain and fungal/mold. The protective film of Ultran Lasur is specially designed with water repellent and permeable properties. Water repellent properties prevent rain or water from seeping into the wood. On the other hand, its permeable film allow water from inside the wood can easily diffuse and evaporate through the surface of the film. These features keep the wood dry and enable it to maintain its optimal moisture content. Therefore, the wood is protected from damage caused by fungal/mold and wood dimensional changes.

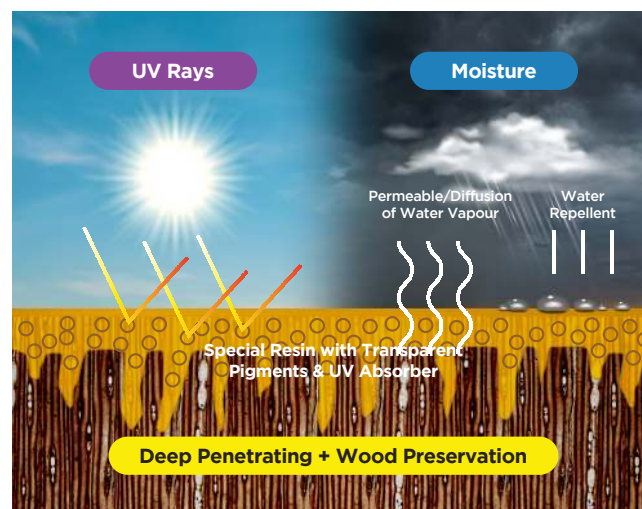

The transparent iron oxide pigment and UV absorber in Ultran Lasur formulation can absorb and reflect UV rays. Thus, wood can be protected from damage caused by UV rays. The usage of transparent iron oxide pigment also gives the wood a translucent color that can optimally enhance the beauty of the wood grain.

Methods of Application

1. Sand the wood with sandpaper No. 180 and ensure surface is free from dust and dirt. For exterior use, it is not recommended to use clear coating system and wood filler.
2. Apply ULTRAN LASUR EL-501 with brush and let it dry for 6 to 8 hours.
3. Apply a minimum of 3 layers of ULTRAN LASUR EL-501 to obtain optimum weather protection. Always sand lightly between coats using No. 400 at each recoating step.
4. Optional: To set the gloss level, apply Ultran Lasur EL-501 ULTRAN LASUR EL-501 NATURAL as the final top coat only.

Maintenance Recommendations

Wood is an organic material that can undergo dimensional changes (swelling-shrinkage) and also degradation. Certain types of hard wood, such as Damar Laut & Bengkirai, have a characteristic where new cracks tend to appear each year. For this reason, it is recommended to check the condition regularly for a maximum of once a year. Please immediately re-coat the impacted areas to prevent rain from seeping into the wood.



Scan for color options.

Ultran Lasur
available in
13 standard colors,
6 Laser series colors,
& **30 tinting colors.**